

Api Credentials

Api Credentials

Purpose and when to use this record

Grant an ecommerce integration only the product, page, store, order, tracking, status, or shipping capabilities it needs.

At a glance

- **Identify it by:** **Name**, and **Allow Write Order Status**.
- **Check its business context:** **Store**.
- **Why care:** Availability and publication flags affect future use without erasing history. Prefer disabling an obsolete setup record when existing transactions still refer to it.
- **Why care:** Grant the smallest capability and shortest practical lifetime. Treat any generated secret as confidential; copy it at creation time and never place it in notes or screenshots.

Before you begin

You need the Brisk permission for the action you are taking on api credentials. If a Create, Edit, or Delete control is absent, do not work around it with another user's account; ask an administrator to review your role.

Have valid **Store** records ready first. Those selections determine where this API Credential belongs and which later screens can find it.

Create an API Credential

The Api Credentials create screen in the Brisk documentation demo.

Create an API Credential for one identifiable integration or device. Do not share one credential across unrelated systems because revocation and audit history would become ambiguous.

1. Select the business context first: **Store**.
2. Enter the required identifying and operational values: **Store**, and **Name**.
3. Review **Is Active**, **Allow Read Products**, **Allow Read Pages**, **Allow Read Store**, **Allow Read Orders**, and **Allow Write Tracking**, plus the remaining screen fields deliberately; these choices control availability or workflow rather than merely describing the record.
4. Save the API Credential, then confirm **Name**, and **Allow Write Order Status** on its detail page before continuing.

After saving: Give the generated secret only to the named client, test each granted capability, and disable the credential promptly if its source network or owner changes.

Delete an API Credential

Disable or revoke this API Credential when access must stop. Delete it only after its audit value is no longer needed and the integration has been moved to a replacement credential.

If the record is merely obsolete, use **Is Active** to remove it from future use while preserving existing references.

On the confirmation page, verify **Name**, and **Allow Write Order Status**. After confirmation, return to the API Credentials list and make sure only the intended API Credential was removed.

Review API Credential details

Use the detail page as the shared record of what this API Credential currently means. Verify **Is Active**, and **Allow Write Order Status** before relying on it for a decision.

Follow **Store** to determine whether the issue is on this API Credential or on one of those linked records.

Next check: Give the generated secret only to the named client, test each granted capability, and disable the credential promptly if its source network or owner changes.


Edit an existing API Credential

Edit this API Credential to reduce access, rotate ownership, set an expiration, or disable the integration. Create a separate credential when the calling system changes.

1. Open the detail page. Compare **Store** with the supporting document or approved request.
2. Recheck **Is Active**, and **Allow Write Order Status**. These values are most likely to change storefront visibility, customer communication, payment, or fulfillment.
3. Save the change, return to the list, and confirm that the API Credential now appears under the expected **Is Active**, and **Allow Write Order Status**.

After the change: Give the generated secret only to the named client, test each granted capability, and disable the credential promptly if its source network or owner changes.

Find and review api credentials

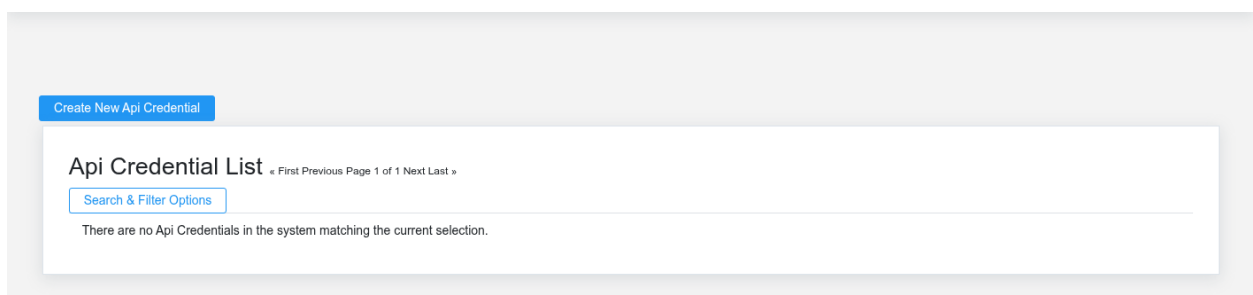

The Api Credentials list screen in the Brisk documentation demo.

Use the Api Credentials list to find the correct record before opening or changing it. Compare **Name**, and **Allow Write Order Status**. Records with similar names or numbers can still belong to different **Store**.

- Keyword search checks **Name**.
- Narrow the list with **Store** filters.

- The initial order emphasizes **Name**. Select a column heading when you need a different comparison.

Open the API Credential whose **Name**, and **Allow Write Order Status** match the task. If it is missing, clear the list filters and recheck **Store**, **Is Active**, and **Allow Write Order Status** rather than creating a replacement immediately.

Fields and business rules

Brisk stores 15 user-relevant fields for this API Credential, including 1 linked-record selection and 0 controlled-choice fields. Create and edit screens may hide calculated or workflow-managed values from this full reference.

Field	Required	What it controls
Store	Yes	The store associated with this API credential.
Name	Yes	Human-readable name for this API credential.
Is Active	No	Whether this API credential is active.
Allow Read Products	No	Whether this API credential allows read products.
Allow Read Pages	No	Whether this API credential allows read pages.
Allow Read Store	No	Whether this API credential allows read store.
Allow Read Orders	No	Whether this API credential allows read orders.
Allow Write Tracking	No	Whether this API credential allows write tracking.
Allow Write Order Status	No	Whether this API credential allows write order status.
Allow Quote Shipping	No	Whether this API credential allows quote shipping.
Expires At	No	Date and time recorded for expires at on this API credential.
Allowed Ip Cidrs	No	Optional newline/comma-separated list of allowed IP or CIDR ranges.
Last Used At	No	Date and time recorded for last used at on this API credential.

Field	Required	What it controls
Last Used Ip	No	The last used IP recorded for this API credential.
Last Rotated At	No	Date and time recorded for last rotated at on this API credential.

What happens next

Give the generated secret only to the named client, test each granted capability, and disable the credential promptly if its source network or owner changes.

Common mistakes and troubleshooting

- **The record will not save:** Recheck **Store**, and **Name** and any message beside the field. A required related record may also be inactive or unavailable to your role.
- **The record saved but is not available where expected:** Recheck **Is Active**, and **Allow Write Order Status**, then clear the filters on the destination list. A saved record can still be inactive, unpublished, locked, unapproved, or in the wrong workflow state.
- **The values look right but the result is wrong:** Open **Store** from the detail page. Correct the specific relationship that is wrong instead of forcing a total or status to compensate for it.